
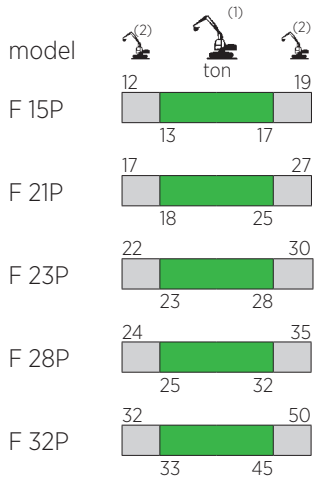


FRANTUMATORE SECONDARIO STATIONARY PULVERIZER BROYEUR HYDRAULIQUE DEMOLEDOR SECUNDARIO STARRE PULVERISIERER GARRA PULVERIZADORA FIXAS

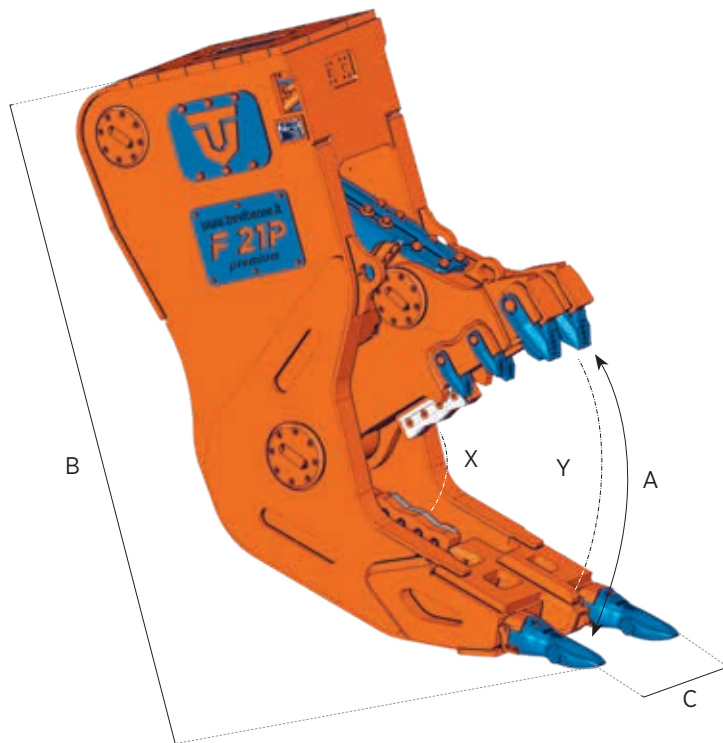

(1) Accoppiamento escavatore-attrezzatura ottimale
Optimum excavator-equipment combination
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
Combinação máquina-implemento ideal

(2) Accoppiamento escavatore-attrezzatura possibile
Possible excavator-equipment combination
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination
Combinação máquina-implemento possível

		F 15P	F 21P**	F 23P*	F 28P**	F32P*
kg	kg.	1370	2070	2470	2680	3290
**	kg.	/	2420	/	3140	/
A	mm.	670	835	835	890	890
B	mm.	1600	1845	2215	1955	2365
C	mm.	460	540	540	670	670
X	t.	205	250	250	270	270
Y	t.	90	100	100	115	115
Ø max	mm.	40	45	45	55	55
♀	bar	250	250	250	250	250
♂	l/min.	130 / 200	180 / 250	180 / 250	230 / 300	230 / 300
♀	bar	/	/	140	/	140
♂	l/min.	/	/	10	/	10
♂		/	/	/	/	/

(*) Modello fornito con rotazione idraulica continua a 360° / (*) Model equipped with continuous hydraulic 360° rotation
(*) Modèle équipé de rotation hydraulique à 360° en continu / (*) Modelo entregado con rotación hidráulica continua a 360°
(*) Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung / (*) Modelo com rotação hidráulica contínua de 360°
(**) Disponibile con Kit Elettromagnete su versione predisposta a richiesta / (**) Available with electro-magnet kit on a version predisposed on demand / (**) Disponible avec kit électro-aimant sur version prédisposée sur requête / (**) Disponible con kit de electroimanes en la versión preparada bajo pedido / (**) Erhältlich mit Elektromagnet-Kit in einer auf Anfrage vorbereiteten Version / (**) Disponível com Electromagnet Kit em uma versão preparada sob solicitação

